



# ECO.100/4 D

MASINA DE GAURIT CU TALPA MAGNETICA, PANA LA Ø 100 MM /FILETAT M30,  
CU SUPORT PIVOTANT



rotire 30°, ambele directii si  
glisare 15-20 mm, inainte si  
inapoi.

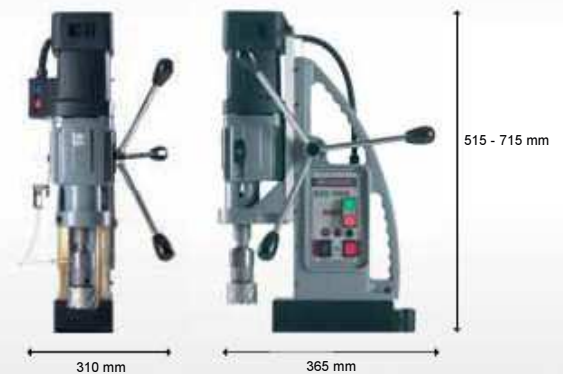

### ECO.100/4 D

#### SPECIFICATII TEHNICE

CAROTE	ø 12 - 100 mm ø 61 - 100 mm (MC3/32)
BURGHIE	ø 1 - 31,75 mm
ZENCUITOARE	ø 10 - 50 mm
TAROZI	M3 - M30
LUNGIME	365 mm
LATIME	310 mm
INALTIME	515 - 715 mm
CURSA	260 mm
GREUTATE	28 kg
MAGNET (L x l x H)	220 x 110 x 64 mm
FORTA MAGNET	3000 kg
PUTERE MOTOR	1900 W
PUTERE TOTALA	2050 W
VITEZA	(I) 42 - 110 min <sup>-1</sup> (II) 65 - 190 min <sup>-1</sup> (III) 140 - 400 min <sup>-1</sup> (IV) 220 - 620 min <sup>-1</sup>
PRINDERE	MC3
VOLTAJ	110 - 120 Volt AC 220 - 240 Volt AC

#### COD:

ECO.100/4 D

#### LIVRARE STANDARD

COD	DESCRIERE
KSP.Q	Sistem de racire cu Quick Connect
IMC.30/19-N	Racire Con Morse 3 - 19,05 mm Weldon

#### DISPOZITIVE AUXILIARE

COD	DESCRIERE
IBK.16	Mandrina ø 1,5 - 16 mm with B16 spindle connection
B16-MC3	Adaptor B16 - Con Morse 3
IBQ.16	Mandrina Quick Connect 16 mm cu prindere B18
B18-MC3	Adaptor B18 - Con Morse 3
MCQ.30	Con Morse 3 - 19,05 mm Quick Connect, suitable pentru sistemul KSP.Q
MC.3/32	Con Morse 3 - 31,75 mm Weldon ø 61-130mm
IMC.30/32-N	Racire Con Morse 3 - 31,75 mm Weldon pentru KSP.Q (ø 61 - 100 mm)
HCS.KIT	Set carote cu prindere Weldon 19,05 mm (2x ø 14   2x ø 18   2x ø 22 mm, 1x pin)
SSPI.06 - 14	Burghie cu prindere Weldon   ø 6 - 14 mm x 30 mm
SPI.06 - 14	Burghie cu prindere Weldon   ø 6 - 14 mm x 55 mm
TDS.200	HSS-Co (M35) Tarozii set (25 pieces)
SCE.25	Zencuitoare ø 10 - 25 mm cu prindere Weldon 19,05 mm
SCE.40	Zencuitoare ø 10 - 40 mm cu prindere Weldon 19,05 mm
SCE.50	Zencuitoare ø 10 - 50 mm cu prindere Weldon 19,05 mm
Taps	Tarozii M3 - M30

